130XE comp. Add-on
-PIA 15 & 16 from the expansion must be cutted and connected with 74LS32, then to PIA
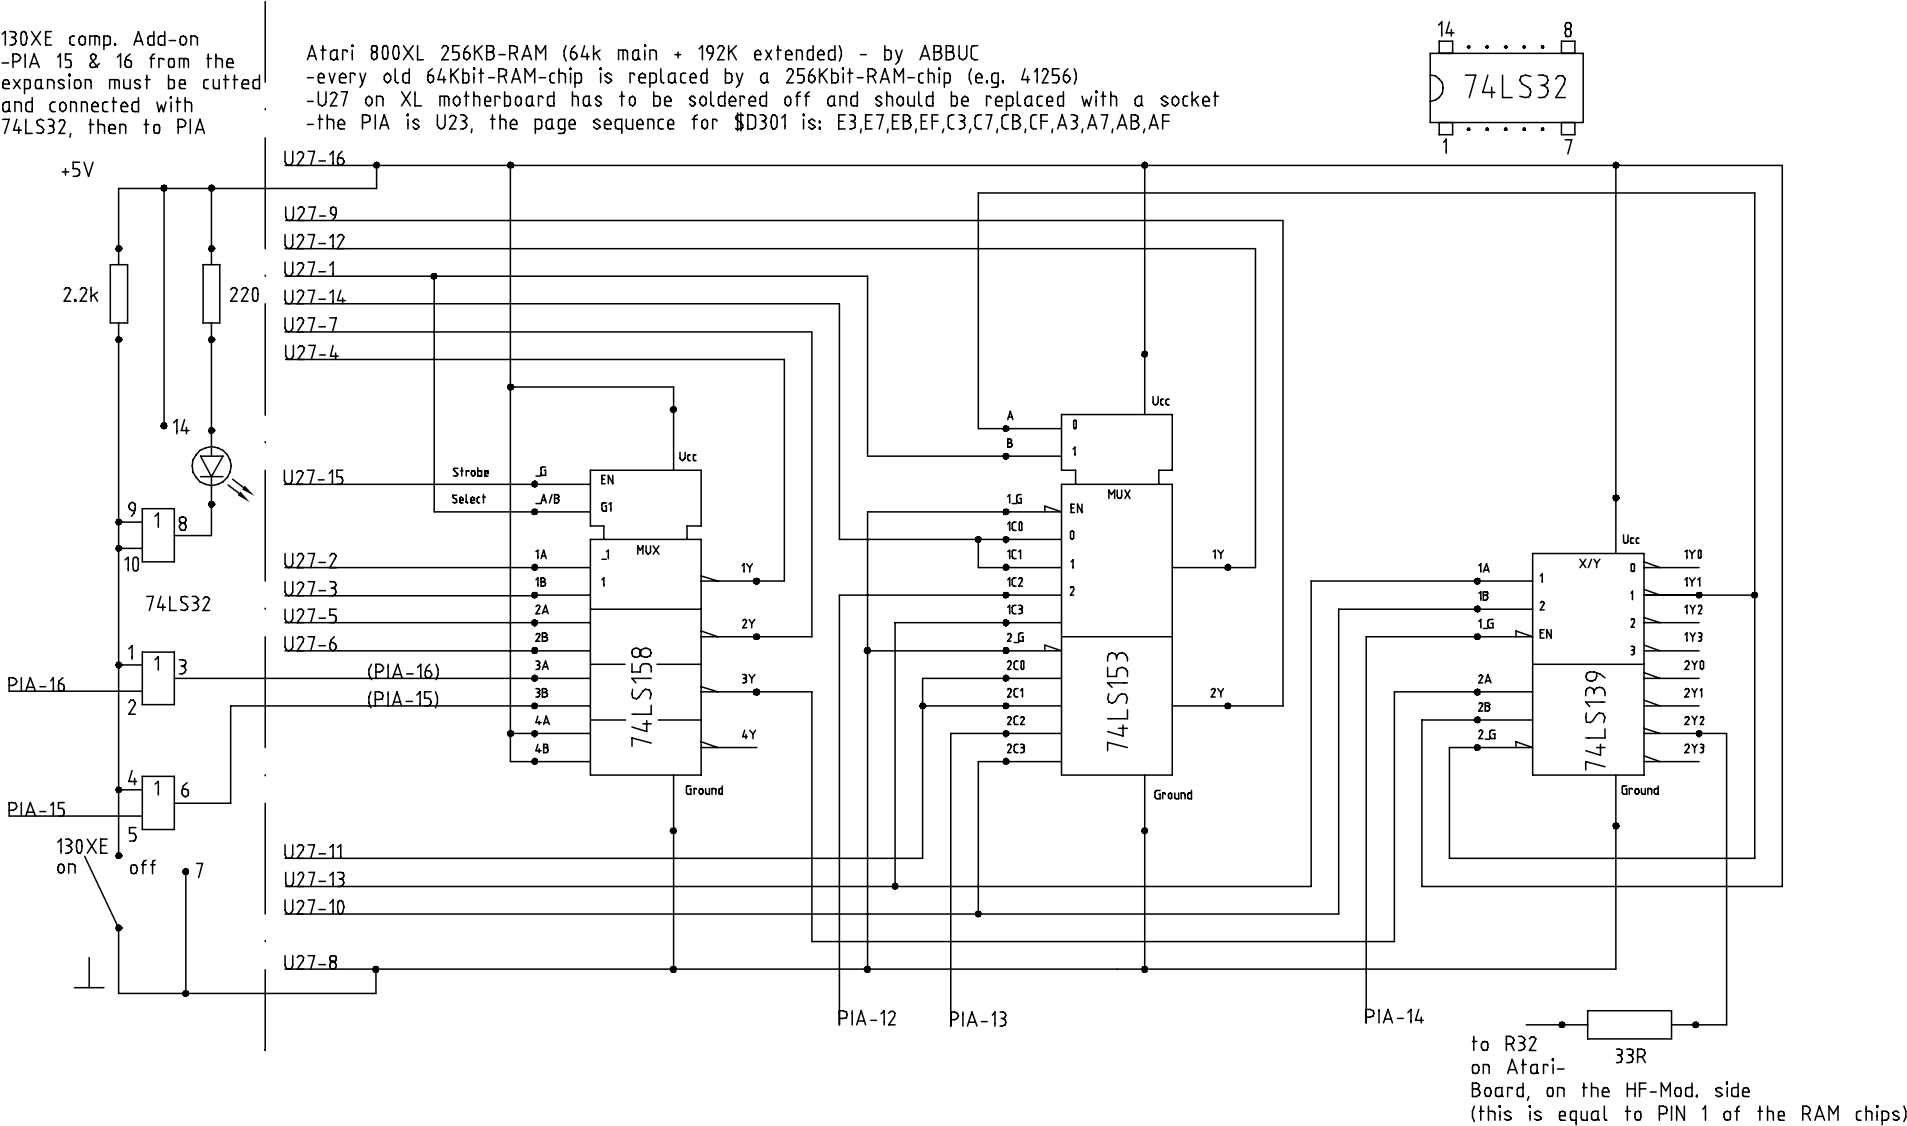
Atari 800XL 256KB-RAM (64k main + 192K extended) - by ABBUC
-every old 64Kbit-RAM-chip is replaced by a 256Kbit-RAM-chip (e.g. 41256)
-U27 on XL motherboard has to be soldered off and should be replaced with a socket
-the PIA is U23, the page sequence for $D301 is: E3,E7,EB,EF,C3,C7,CB,CF,A3,A7,AB,AF